


Products



Ready to use, in cold-drawn ST 52 BK steel, tol. H9 EN 10305-2 E355+C

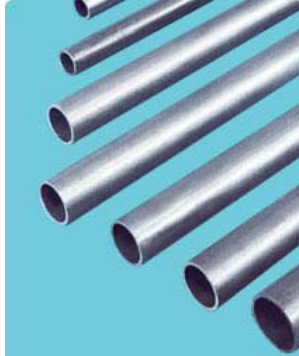

Download the file

Ready to use, in cold-drawn ST 52 BK steel for the manufacture of oleo-pneumatic cylinders.

Technical characteristics

Material:	UNI EN 10305-2 E355+C Steel
Tolerance:	Øi ISO H9/H10
Roughness:	Max Ra = 0,8 Micron
Straightness:	1/1000

Dimensional range available in stock

Thickness	Dim. Øe x Øi mm	weight Kg/m	Thickness	Dim. Øe x Øi mm	weight Kg/m
1,5	28 x 25	0,98	5	73 x 63	8,38
2	36 x 32	1,67	5	75 x 65	8,63
2,5	30 x 25	1,69	5	80 x 70	9,25
2,5	40 x 35	2,31	5	85 x 75	9,86
2,5	45 x 40	2,62	5	90 x 80	10,48
2,5	50 x 45	2,92	5	95 x 85	11,10
2,5	55 x 50	3,24	5	100 x 90	11,71
2,5	65 x 60	3,85	5	105 x 95	12,33
2,5	68 x 63	4,04	5	110 x 100	12,95
2,5	75 x 70	4,46	5	160 x 150	19,11
2,5	85 x 80	5,09	5	210 x 200	25,28
3	69 x 63	4,88	6	72 x 60	9,70
3	86 x 80	6,14	6	75 x 63	10,21
3	106 x 100	7,62	6	82 x 70	11,25
4	40 x 32	3,5	6	92 x 80	12,72
4	62 x 54	5,61	6	102 x 90	14,95
5	35 x 25	3,69	7,5	65 x 50	10,63
5	40 x 30	4,31	7,5	75 x 60	12,48
5	42 x 32	4,56	7,5	85 x 70	14,33
5	45 x 35	4,93	7,5	90 x 75	15,26
5	50 x 40	5,55	7,5	95 x 80	16,18
5	55 x 45	6,16	7,5	100 x 85	17,11
5	60 x 50	6,78	7,5	105 x 90	18,03
5	65 x 55	7,40	7,5	110 x 95	18,96
5	70 x 60	8,01	7,5	115 x 100	19,88
			7,5	125 x 110	21,73

Other dimensions are supplied on request.